

PLEASE READ AND FOLLOW ALL WARNINGS



UT8735
1/4" EXTENDED-LENGTH DIE GRINDER

Read Operating Instructions

Always become familiar with all the instructions and warnings before operating any power tool.



Always Wear Approved Eye Protection

Impact resistant eye protection should meet or exceed the standards as set forth in the United States ANSI Z87.1, Occupational and Educational Eye and Face Protection. Look for the marking Z87.1 on your eye protection to insure that it is an approved style. For further information, ANSI Z87.1, Occupational and Educational Eye and Face Protection, is available from the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036.



Hearing Protection is Recommended

Hearing protection should be used when the noise level exposure equals or exceeds an 8 hour time-weighted average sound level of 85 dBA. Process noise, reflective surfaces, other tools being operated nearby, all add to the noise level present in your work area. If you are unable to determine your noise level exposure, we recommend the use of hearing protection.



Avoid Prolonged Exposure to Vibration

Tools can vibrate during use. Prolonged exposure to vibration or very repetitive hand and arm movements, can cause injury. Stop using any tool if discomfort, tingling feeling or pain occurs. You should consult your physician before resuming use of the tool.



90 PSIG Maximum

This tool is designed to operate at


an air pressure of 90 pounds per square inch gauge pressure (90 PSIG) maximum, at the tool. Use of higher air pressure can, and may cause injury. Also, the use of higher air pressure places the internal components under loads and stresses they were not designed for, causing premature failure. The air supply should be clean and dry, preferably lubricated. For best results, drain the moisture from your compressor daily.

WARNING:

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to cause cancer, birth defects or reproductive harm. Some examples of these chemicals are:

- Lead from lead-based paints
- Crystalline silica from bricks, cement and other masonry products
- Arsenic and chromium from chemically treated lumber

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals, work in a well-ventilated area and work with approved safety equipment such as those dust masks that are specially designed to filter out microscopic particles.

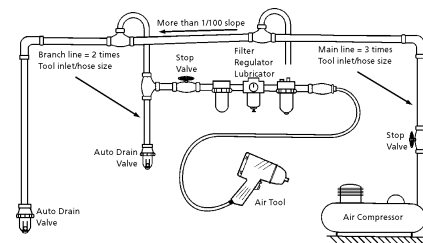

Description

Universal Tool Extended Straight-Handle design Die Grinder is ideal for work in deep crevices. Features pre-loaded bearings for long life and one-piece die-cast housing for durability. Rear exhaust minimizes chip flyback. Includes lever throttle and built-in regulator for precise speed control. **(Use only adequately speed-rated accessories.)**



Safety Instructions

The following instructions are furnished as general guidelines for use of your pneumatic tool. They cannot comprehensively cover all possible or conceivable uses of the subject tool. For additional information on the safe use of air tools, we advise you to obtain a copy of ANSI B186.1 Safety Code for Portable Air Tools, available from the following source:

American National Standards Institute, Inc.
11 West 42nd Street
New York, NY 10036.

The use of the word "shall" in the following instructions, indicates that adherence to the particular requirement is necessary to conform to ANSI B186.1.

Tool Application and Usage

Portable tools shall be used only for the purposes intended in their design and within the capacity for which they were intended and rated. It shall be the tool owner's and/or employer's responsibility to instruct each operator in the safe use of the tool. Tools shall not be used without guards and safety

devices as furnished by the manufacturer. Where an air tool is modified or altered, the modifier shall provide the safeguards to enable it to be safely used in the operations intended and to comply with any applicable provisions as contained in ANSI B186.1.

Tool Installation

Pressure regulators shall be used to limit air pressure to the rated pressure where the supply pressure exceeds the tool's rated pressure. Air hoses and lines shall be relieved of compressed air before being disconnected or disjoined, unless there is automatic valve closing protection at the joint being separated. Synthetic lubricants which can cause deterioration of elastomer seals shall not be used in air systems of air tools.

Tool Maintenance

It shall be the tool owner's and/or employer's responsibility to assure that tools are maintained in a safe operating condition. Tool maintenance and repair shall be performed by authorized, trained, competent personnel. Tools shall be disconnected from their compressed air supply before repairs are attempted. Repairs shall be consistent with the manufacturer's recommended procedures. Tool, hoses and fittings shall be replaced if unsuitable for safe operation. It shall be the tool owner's and/or employer's responsibility to keep required rating markings and warnings on the tool in legible condition.

Universal Tool
A Division of Florida Pneumatic Manufacturing Corporation
851 Jupiter Park Lane, Jupiter, Florida 33458
Toll Free 1-800-327-9403

Read these instructions carefully before attempting to install, operate or service this Florida Pneumatic product. Failure to comply with the instructions could result in personal injury and/or property damage! Retain these instructions for future reference.


FPMC

PL0226

Specifications

Max. free speed.....	22,000 RPM
Collet Size.....	1/4"
Overall length.....	13 1/8"
Weight.....	2 3/4 lbs.
Air inlet size.....	1/4" NPT
Average Air Consumption.....	4 CFM
Recommended hose size.....	3/8" I.D.
Maximum operating pressure.....	90 PSI
Exhaust.....	Rear

Parts Breakdown for UT8735

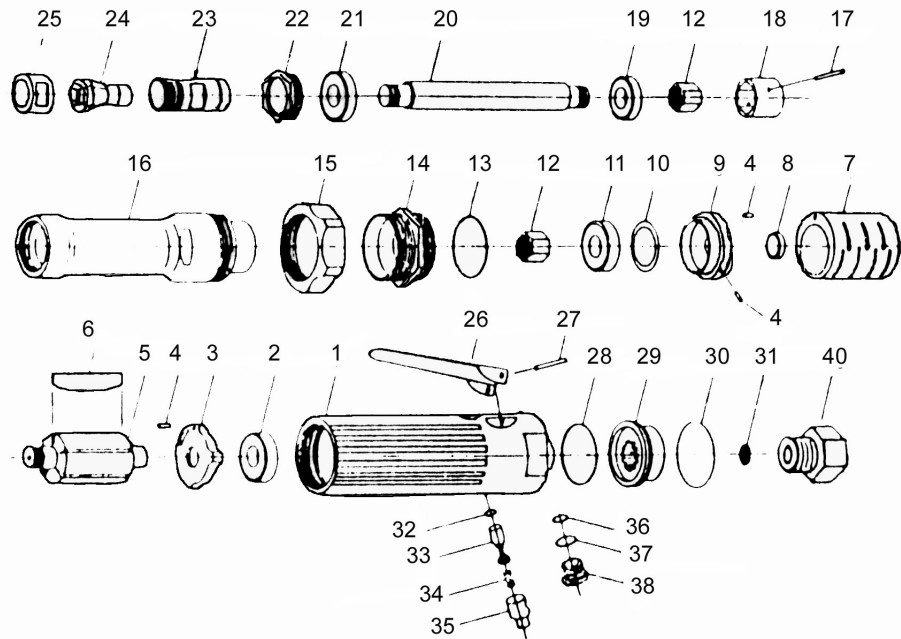

Replacement Parts for UT8735

Ref.	Description	Part #	Ref.	Description	Part #
1	Motor Housing	8731752	22	Spindle Nut	8732228
2	Rear Bearing	8729020	23	Spindle	8729715
3	Rear End Plate	8731757	24	1/4" Collet	892233
4	Pin (3)	8729707		1/8" Collet	892232
5	Rotor	8731760	25	Collet Nut	8729719
6	Rotor Blades (5)	8731761	26	Throttle Lever	8729264
7	Cylinder	8731759	27	Throttle Lever Pin	8729167
8	Bearing Spacer	8729711	28	O-Ring	8732247
9	Front End Plate	8731764	29	Exhaust Deflector	8729702
10	Shim (2)	8729714	30	Circlip	8729703
11	Front Bearing	8729113	31	Screen	81005726
12	Drive Nut (2)	8732232	32	O-Ring	81012370
13	O-Ring	8732238	33	Throttle Valve	8729259
14	Threaded Adaptor	8731775	34	Spring	8729258
15	Coupling Nut	8731774	35	Air Regulator	8729282
16	Extension Housing	8732235	36	O-Ring	8729088
17	Pin	8732234	37	O-Ring	8729073
18	Coupling	8731781	38	Valve Screw	8729262
19	Ball Bearing	81008854		Collet Wrench (2)	8732248
20	Extension Shaft	8732230		(Not Shown)	
21	Ball Bearing	8732229	40	Inlet Bushing	8730120

Limited Warranty

Universal Tool warrants its tools to be free from defects in material and workmanship for one year from the date of purchase. This warranty does not apply to tools which have been abused, misused, modified or repaired by someone other than Universal Tool or its authorized service centers. If a Universal Tool proves defective in material or workmanship within one year after purchase, return it to any authorized service center or to Universal Tool, freight prepaid. Please enclose your name, address and adequate proof of purchase date with a brief description of the defect. Universal Tool will, at its option, repair or replace defective tools, free of charge. Repairs or replacements are warranted as described above for the remainder of the warranty period. Universal Tool's sole liability and your exclusive remedy under this warranty is limited to repair or replacement of the defective tool. There are no other warranties expressed or implied and Universal Tool shall not be liable for incidental, consequential or special damages, or any other damages, costs or expense of repair or replacement as described above.